



PowerBuss AC & DC Series Options:

Cooling options:

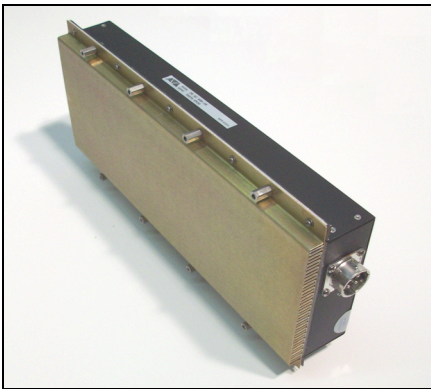


Convection through optional Finned Heat-sink shown above (Add suffix F).
 Note: Consult factory for operating temp.

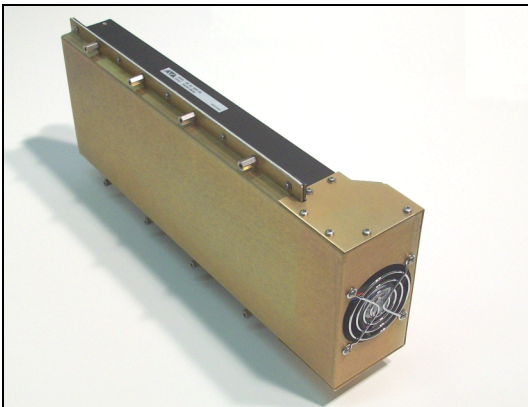

Convection/Fan Plenum Assembly shown above (Add suffix FP).
 Note: Consult factory for operating temp.

Additional Package option:

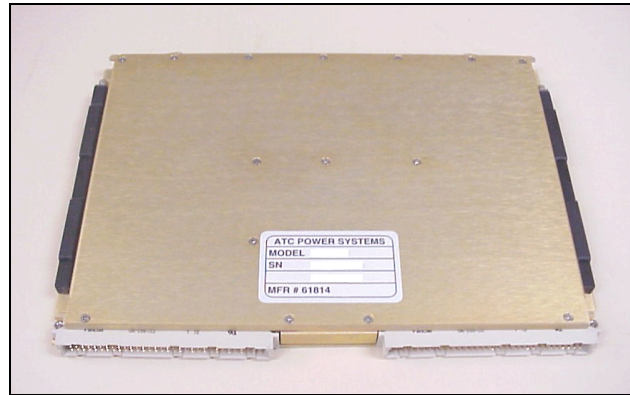

6U VME IEEE Style (6"W x 9"D x 0.8"H)
 Conduction cooled to card edge (-40 to +70°C rail temp.)
 This option is available for the PBAC-250 version.

Color options:

Yellow Chromate: Chem Coat PER MIL-C-5541 Class 3

CARC Black: Color Number 37030 PER-FED-STD-595

CARC Sand: Color Number 33303 PER-FED-STD-595

CARC Green: Color Number 34094 PER-FED-STD-595

Consult Factory for Part Number change for Black, Sand, and Green. Base model will be Yellow Chromate.

**PLEASE CALL ATC POWER SYSTEMS TODAY TO
 DISCUSS YOUR SPECIFIC POWER REQUIREMENTS!**